




\*EXCEPT FOR RECYCLED CONTENT



\*TVOC AT 28 DAYS

- > Extensive Design Possibilities
- > Best In Class Functional Performance
- > Low Cost and Simplified Maintenance



HOMOGENEOUS  
COMPACT VINYL

**Premium  
Collection**

AUSTRALIAN RANGE



THE ULTIMATE  
FLOORING EXPERIENCE

HOMOGENEOUS  
COMPACT VINYL

# Premium Collection

AUSTRALIAN RANGE

## Primo Premium

Light Pure Grey



21010 651

Light Warm Grey



21010 672

Light Cool Beige



21010 675

Medium Warm Beige




21010 658

Dark Warm Beige



21010 659

Pure Grey

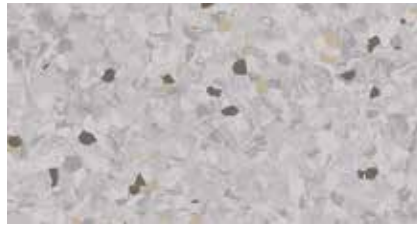


21010 652

Medium Pure Grey



21010 670

Medium Cool Grey

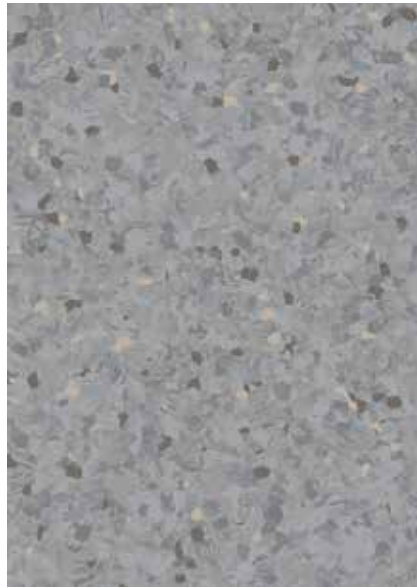

21010 673

Medium Cool Beige



21010 657

Medium Grey Beige




21010 655

Medium Yellow Beige




21010 660

Medium Dark Pure Grey

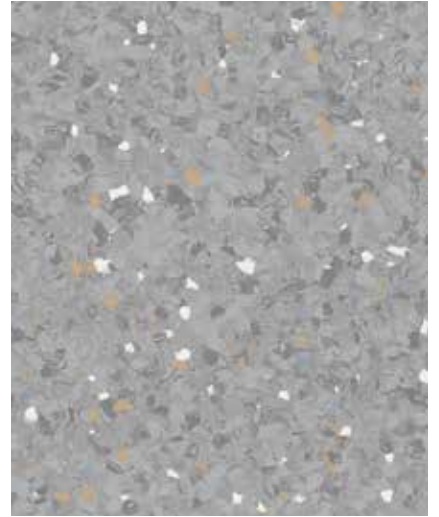

21010 671

Dark Cool Grey

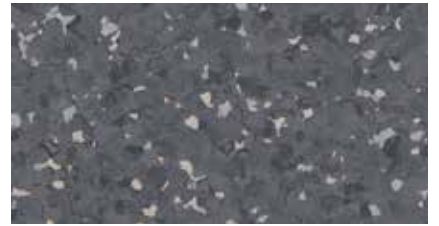

21010 674

Black



21010 654

Dark Warm Beige




21010 656

Terracotta




21010 662

Light Blue

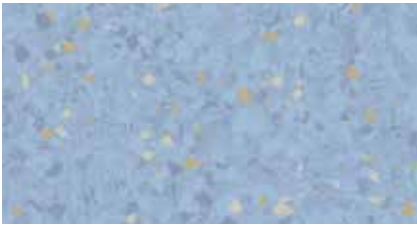


21010 682

Medium Blue

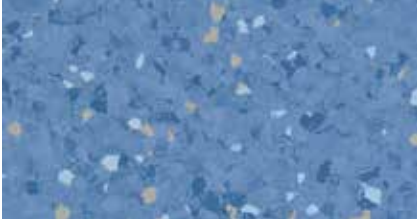

21010 665

Dark Blue

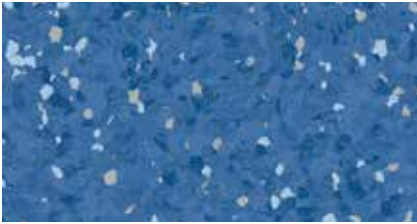

21010 666



Red




21010 642

Light Blue Green




21010 688

Medium Blue Green

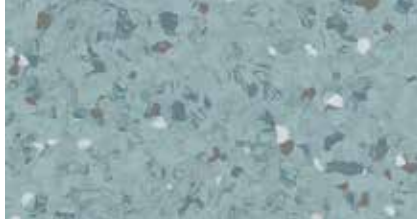

21010 689

Dark Blue Green

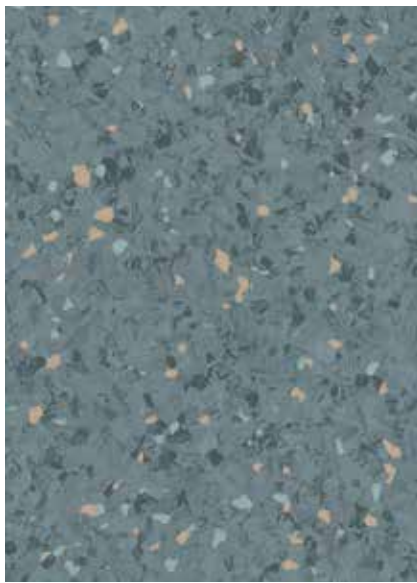

21010 690

Dark Green




21010 681

Medium Yellow Grey



21010 686


Light Grey Yellow

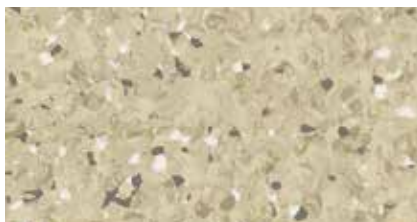

21010 685

## Primo Safe.T

Medium Blue

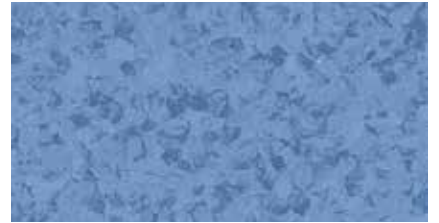

21013 806

Medium Cool Grey



21013 794

Light Pure Grey



21013 790

Medium Warm Beige



21013 800


Dark Warm Beige



21013 801

## Primo SD

Medium Dark Pure Grey

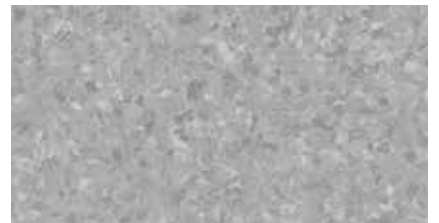

21012 562

Medium Warm Beige



21012 565

## Description

The Premium Collection are homogeneous, high-quality vinyl floorings for most types of premises such as schools, healthcare facilities and other types of public buildings. Its unique colour, design and function coordination system allows endless combination possibilities. Beneficiary easy and low cost maintenance enhance the life cycle cost. The Premium Collection are produced with phthalate-free technology and improved indoor air quality.

CERTIFICATION & CLASSIFICATION	STANDARDS	Primo Premium	Primo Safe.T	Primo SD
Type of floorcovering	EN 649	Homogeneous vinyl flooring	Slip resistant homogenous vinyl flooring	Static Dissipative pressed homogenous vinyl flooring
Classification	EN 685	Commercial: 34 Industrial: 43	Commercial: 34 Industrial: 43	Commercial: 34 Industrial: 43
TECHNICAL CHARACTERISTICS	STANDARDS	Primo Premium	Primo Safe.T	Primo SD
Wear layer thickness	EN 429	2.0mm	2.0mm	2.0mm
Surface treatment		PUR reinforced	Safe.T clean	-
Total thickness	EN 428	2.0mm	2.0mm	2.0mm
Total weight/m <sup>2</sup>	EN 430	3000g	3000g	3000g
Form of delivery	EN 426	23lm x 200cm	23lm x 200cm	23lm x 200cm
TECHNICAL CHARACTERISTICS	STANDARDS	Primo Premium	Primo Safe.T	Primo SD
Dimensional stability	ISO 23999 (EN 434)	= 0.40% (rolls)	= 0.40% (rolls)	= 0.40% (rolls)
Abrasion Volume Loss	EN 660: Part 2	Group P: <= 4.0mm <sup>3</sup>	Group P: <= 4.0mm <sup>3</sup>	Group P: <= 4.0mm <sup>3</sup>
Residual indentation	ISO 24343-1 (EN 433)	Average Measured Value = 0.03mm	Average Measured Value = 0.03mm	Average Measured Value = 0.03mm
Castors chair test	ISO 4918 (EN 425)	Suitable	Suitable	Suitable
Electrical Insulation	VDE 0100, Part 600	-	-	R <sub>i</sub> >= 5x10 <sup>4</sup> Ohms
Electrical resistance	EN1081	-	-	R <sub>i</sub> >= 10 <sup>8</sup> Ohms
Total VOC emissions	AgBB/DIBt	= 10µg/m <sup>3</sup> (after 28 days)	= 10µg/m <sup>3</sup> (after 28 days)	= 10µg/m <sup>3</sup> (after 28 days)
Global GreenTagCertTM	LCA Rate:	Gold Plus / Green Rate: Level A	-	-
Underfloor heating		max 27°C	max 27°C	max 27°C
Thermal resistance	EN 12667	0.01m <sup>2</sup> K/W	0.01m <sup>2</sup> K/W	0.01m <sup>2</sup> K/W
Reaction to fire	ISO 45 9239-1	10.5 kW/m <sup>2</sup> Smoke 32%.min	10.5 kW/m <sup>2</sup> Smoke 32%.min	10.5 kW/m <sup>2</sup> Smoke 32%.min
Light fastness	EN ISO 105-B02	= level 6	= level 6	= level 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance	Good resistance	Good resistance
Bacteria resistance	ISO 846: Part C	Does not favour growth	Does not favour growth	Does not favour growth
Slip resistance	Slip resistance AS4586/DIN51130	R10/P4	R10/P4	R10/P3

## Recommended specification clause for your project

- Tarkett Primo Premium product number 21010\_ \_ \_
- 2mm gauge, 2m wide homogeneous vinyl floor covering
- phthalate free, TVOC below 10µg/m<sup>3</sup>
- LCA certification to at least GreenTag Gold Plus or similar
- Must meet abrasion resistance of Group T according to EN 660
- Must meet Slip resistance R10 and P4 to AS4586/DIN51130
- Use area classification of 34, 43 to EN 685 (ISO 10874)
- Manufactured in a plant with certification to ISO 9001 and ISO14001
- 10 year commercial manufacturer's product warranty
- Must be installed as per manufacturer's instructions and as per AS 1884

The information in this data sheet is correct at date of publication however, due to Tarkett's commitment for ongoing product improvement, we reserve the right to change this information without notice. Please note that Tarkett's instructions regarding installation, cleaning and maintenance must be observed. Please contact Tarkett for further information on these instructions.



For more information contact your Tarkett Sales Representative or call 1300 851 484.  
[www.tarkett.com.au](http://www.tarkett.com.au)



THE ULTIMATE  
FLOORING EXPERIENCE